


HSN CODE : 84818020

DUCTILE COUPLING

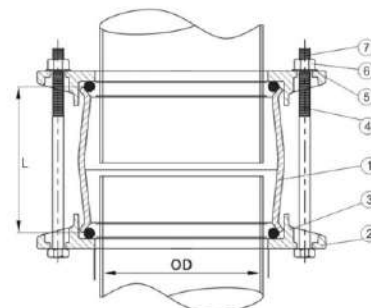

Features

- 1- PN10/16 working pressure
- 2- Equipped with galvanized steel bolts, nuts.

- 3- EPDM or NBR rubber seals.
- 4- Ductile Iron GGG50 with blue FBE coated
- 5- Size Range from 2" to 12"

SIZE (inch)	DN	OD	L	Bolt No.	Bolt L
1-1/4"	32	40	125	2	M12*160
1-1/2"	40	50	130	2	M12*160
2"	50	63	130	2	M12*180
2-1/2"	65	75	130	2	M12*180
3"	80	90	150	3	M12*190
4"	100	110	150	3	M12*210
5"	125	125	150	4	M12*210
5"	125	140	170	4	M12*210
6"	150	160	180	4	M12*210
6"	150	180	180	4	M12*240
8"	200	200	180	4	M12*240
8"	200	225	180	4	M12*250

MATERIAL SPECIFICATION

P.NO.	ITEM NAME	MATERIAL	SPECIFICATION
1	Sleeve	Ductile Iron	GGG50
2	End Ring	Ductile Iron	GGG50
3	Gasket	Rubber	EPDM
4	Bolt	Galvanized Steel	ISO898-1:1999
5	Washer	Galvanized Steel	
6	Nut	Galvanized Steel	ISO898-1:1992
7	Cap	Plastic	

DI G BOLT COUPLING IC RATE

50MM	63MM	75MM	90MM	110MM
500/-	550/-	600/-	850/-	1200/-