


GUN METAL

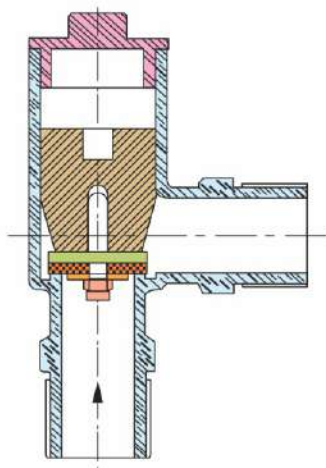

INCH.	MM	PER PC.
1/2"	15	Rs. 800/-
3/4"	20	Rs. 1200/-
1"	25	Rs. 2000/-
1 1/4"	32	Rs. 3000/-
1 1/2"	40	Rs. 4500/-
2"	50	Rs. 5000/-


HSN CODE : 84818090

FERRULE COCK



NUT 1	
WASHER 2	
SEAT 3	
WASHER PLATE 4	
PLUG 5	
BODY 6	
CAP 7	



- Item Code: GM0289
- Pressure Rating: PN-16
- Testing Standard: IS 2692
- Size Range: 15mm
- Product Standard: IS 2692

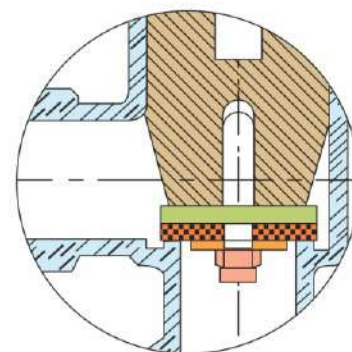


PRESSURE/TEMPERATURE DIAGRAM

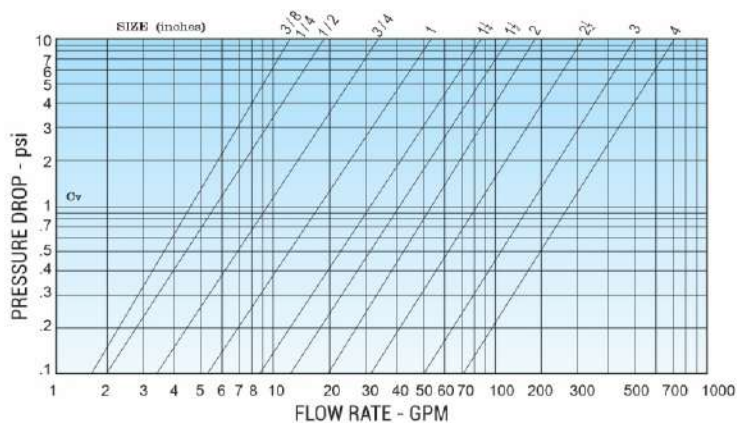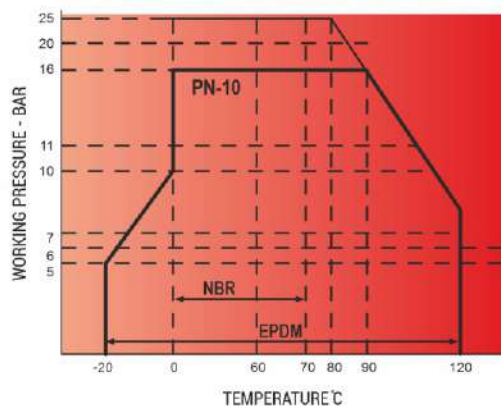

PRINCIPAL FEATURES

- Design Std. IS 2692.
- Designed for high pressure.
- Resilient Rubber Disc.
- Screwed Male Taper threads to BS21 / IS:554.
- Best suitable for underground installation.

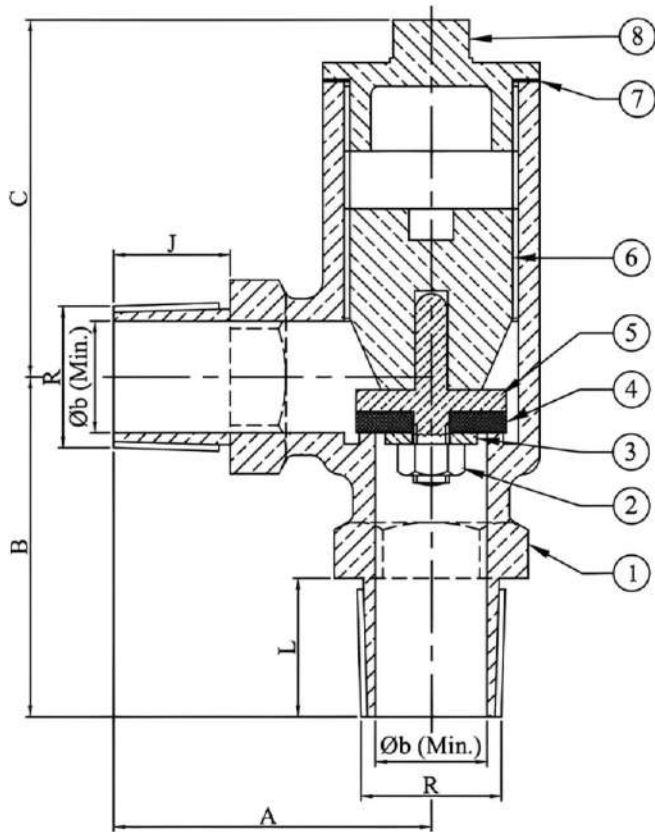

SUITABLE FOR WATER

END CONNECTION

- Screwed Male BSP Taper threads to BS:21 / IS:554.

UTILISATION & SERVICE

- "SHREE" Brass Ferrule Cocks are suitable for both above-ground & underground installations. Best suited for potable water, treated fresh water.

WORKING PRESSURE

- Maximum Working Pressure: 16 Bar.
- See Pressure / Temperature Diagram.

TEMPERATURE LIMITS

- Maximum working temperature: 100°C.
- See Pressure / Temperature Diagram.

PRESSURE RATING: PN-16

TEST PRESSURE (Hydrostatic)

BODY	SEAT
30 Bar	22 Bar

DIMENSION TABLE

SIZE (mm)	15
T	60
S	55
OA	12.3
BSPT TAPER	1/2"
Item Code	GM 0289

MATERIAL SPECIFICATION

P.NO.	NAME OF PART	MATERIAL	SPECIFICATION
1	NUT	GUN METAL	IS 319
2	WASHER	BRASS	IS 319
3	SEAT	RUBBER	
4	WASHER PLATE	BRASS	IS 319
5	PLUG	GUN METAL	BRASS (En1982 Gr. CC754S)
6	BODY	GUN METAL	BRASS (En1982 Gr. CC754S)
7	CAP	GUN METAL	BRASS (En1982 Gr. CC754S)

Note: The above data is subject to change without notice due to our continuing product improvement program.